


DECORATION MADE EASY

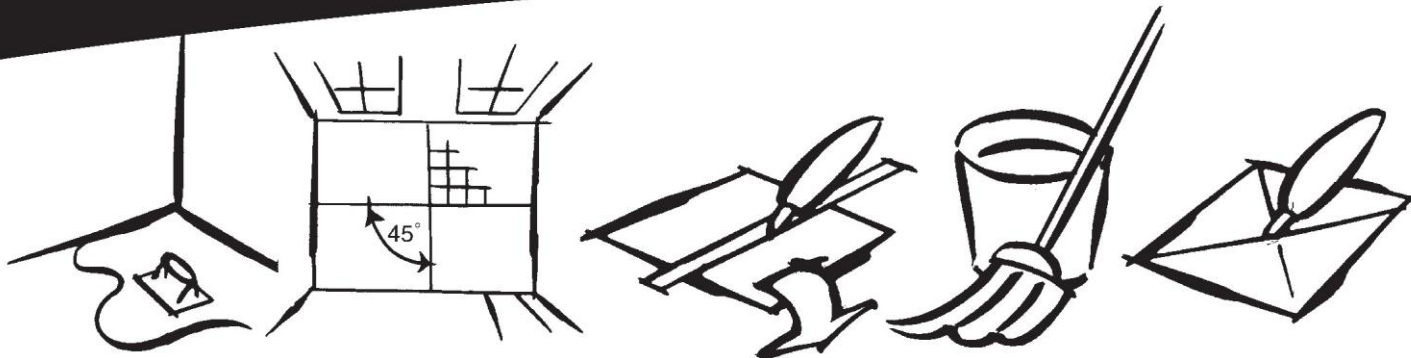

BEFORE YOU START

Read all instructions before proceeding.

These tiles are suitable as indoor floor tiles and should only be used as such.

Check each pack to ensure that batch numbers are the same.

Before starting, tiles must be removed from their packaging and laid flat for 24 hours at a room temperature of 18° C or above.

Check that the floor is perfectly dry, smooth, level, sound, clean and dust free. Do not install on asphalt, bituminous surfaces or existing floor coverings.

For best adhesion all surfaces must be primed. We recommend using a dilute solution of Bondcrete or similar as per manufacturers instructions.

Concrete floors must have a damp proof membrane. New concrete floors must be completely cured (dry).

Timber floors should be overlaid with hardboard, smooth side up.

Timber treated with inhibitors and or preservatives is not suitable as a sub-floor.

PLAN YOUR FLOOR

Divide the room into 4 sections by drawing 2 perpendicular lines across the floor and use these lines as your guide to ensure you are laying the tiles perfectly square.

Once the floor has been primed and after a final vacuum for dust, you are ready to start.

It is recommended that when laying the tiles, you start from the middle of the room and tile each section one at a time.

NOTE: Grout lines or borders on tiles vary marginally; rotate the tiles to achieve the best appearance.



LAYING TILES

Peel the backing from a tile and CAREFULLY place it at the centre point. Check that it is correctly positioned and then apply firm all-over pressure to achieve complete contact.

Lay each quarter of the room separately, making sure the tiles are a close fit but do not force tiles together.

Warning: The backing paper on this product is slippery, once removed from the tile, dispose of immediately.

CUTTING TILES

To cut tiles, simply mark the cutting line with a utility knife and snap in a downward motion.

To fit edge tiles that need to be cut, keeping the backing paper on, lay the tile to be cut exactly over the last full tile; place another full tile against the wall and mark the cutting line where the tiles overlap.

Cut and remove backing paper to fit tile in position. Always place the cut edge to the wall.

Shaped cuts
To fit around doorframes, pipes etc. just make a cardboard template as a guide and use this to draw an outline onto the tile. Cut to shape and check that it fits before peeling the backing paper.

Finishing
When you have finished laying, go over the floor once again to check that all tiles are firmly stuck down.

Do not wash the floor for 5-7 days.

MAINTENANCE

For best results apply Roberts vinyl floor polish or similar. This will protect your vinyl tiles and help maintain an 'as new' appearance.

For general cleaning we recommend a damp mop using a mild neutral detergent such as Roberts vinyl floor cleaner or similar.

Never use abrasive pads or cleaners, strong alkaline detergents, ammonia, chlorine detergents or undiluted bleaches.

Always wipe spills away immediately with a damp cloth or sponge.

Use a non-rubber backed mat in doorways and entrances to inhibit any excess dirt, grit etc.

When moving furniture or heavy objects, place protective cloths or carpet face down under the legs or castors.

Be aware that rubber can permanently mark your floor by leaving a yellowish stain. This includes rubber used in rubber-backed mats, rubber wheels on trolleys, rubber feet on stools and other furniture, rubber soles on low cost shoes or slippers.

REPLACING TILES

Starting from the outside in, cut tile diagonally from corner to corner. Gently warm the tile using a hairdryer and then using a blunt knife simply peel away.

Guarantee
This product is guaranteed against manufacturing defects for the time indicated on the outside packaging.

Any claim for replacement of tiles due to colour or pattern variation or obvious defects must be made before the tiles are laid.

If the product is found to be faulty, it will be replaced at no charge.

This product is manufactured exclusively for Gerflor Australasia.

1800 060 785
www.gerflor.com.au

Gerflor.